
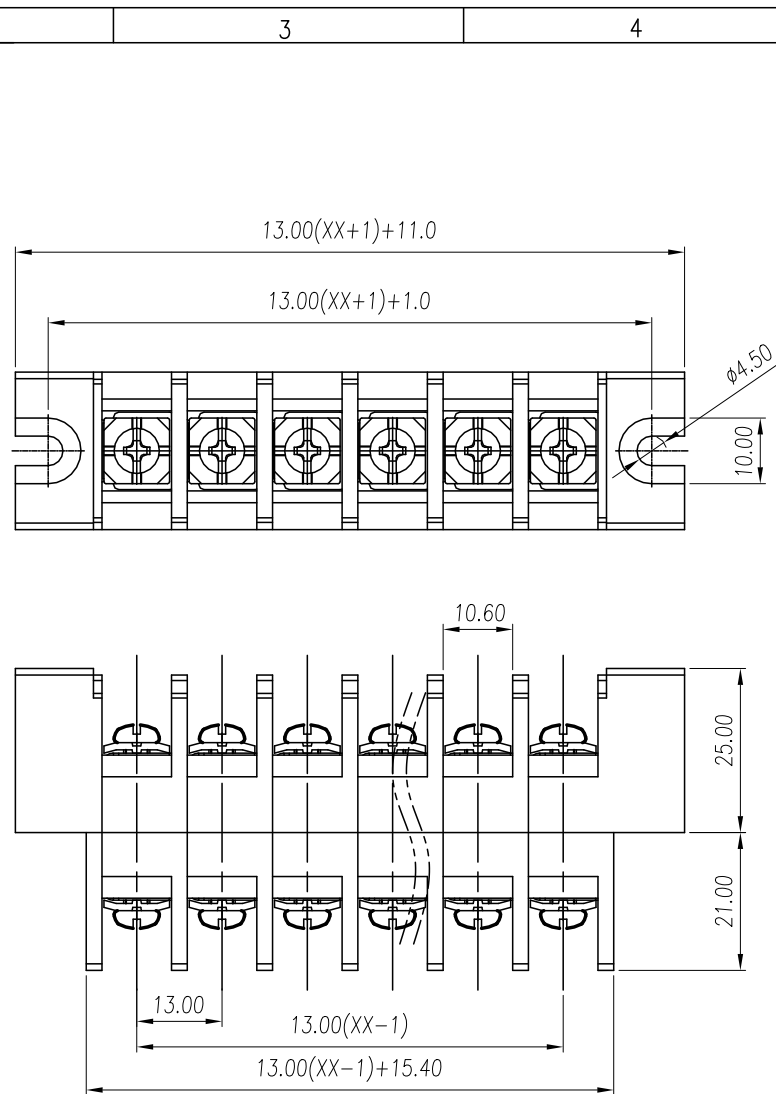
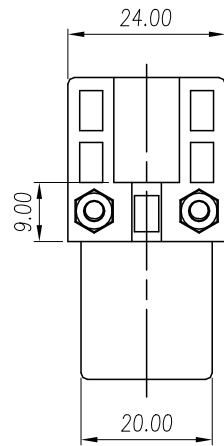


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除书给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担侵权责任。本公司保留对专利及发明、实用新型和外观设计的所有权利。

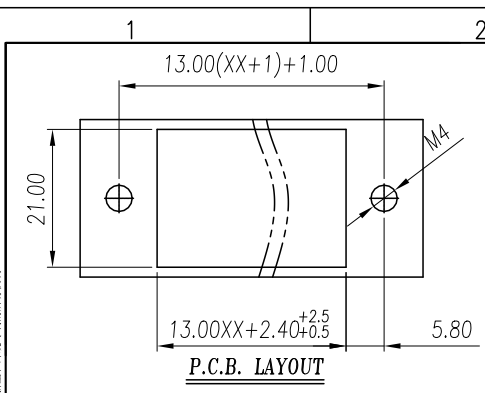

5 6

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		ZhaoXY	24.04.01

电气性能/Electrical

额定电压 /Rated voltage	600V
额定电流 /Rated current	50A
接触电阻 /Contact resistance	20mΩ
绝缘电阻 /Insulation resistance	500MΩ/DC500V
使用线径 /Wire range	22~8AWG
耐电压 /With standing voltage	AC 2200V/1 Min

机械性能/Mechanica

扭矩 /Torque	1.2Nm(10.6Lb.in)
温度范围 /Temp.Range	-40°C~+130°C
瞬时温度 /MAX Soldering	+260°C, for 5 Sec

尺寸 /Dimensions

间距 /Pitch	13mm
极数 /Poles	01~15p

6

6	Screws2	Steel	M3 Steel Zn plated
5	Nut2	Steel	M3 Steel Zn plated
4	Nut1	Steel	M4 Steel Zn plated
3	Current carrier	Copper Alloy	Sn Plated
2	Screws1	Steel	M4 Steel Ni plated
1	Housing	PBT	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES. ZhaoXY DATE 24.04.01 UNITS mm THIRD ANGLE PROJECTION

CHK. HuHT DATE 24.04.01 SIZE A4 TYPE: CUSTOMER DRAWING SHEET 1 of 1

APP. Jason DATE 24.04.01 SCALE 2:1 DRAWING TYPE: SP-03 REV V1

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

PART NO.:
WJ10-13.0-XXP-1Y-00A

General Tolerances

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

1

2

3

4

5

FOR-0371 Rev.1.0