





慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

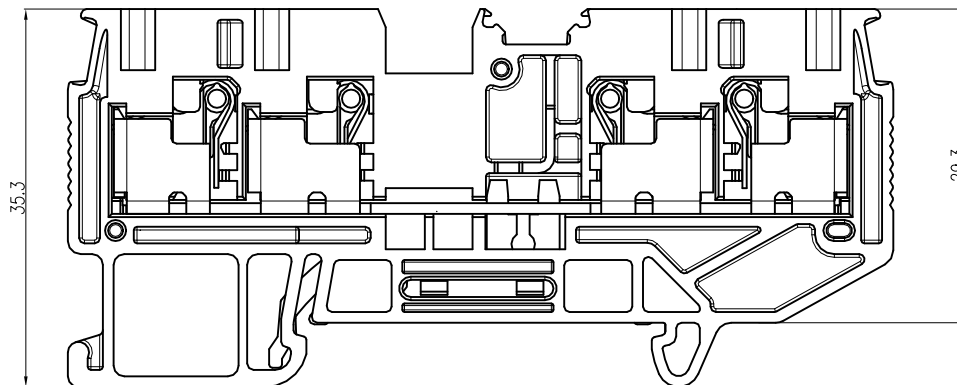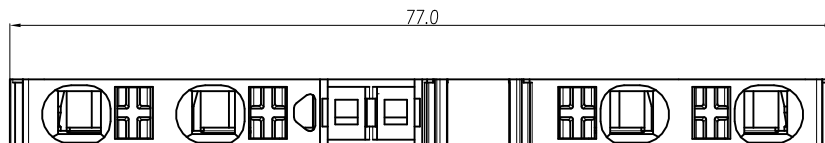

6.2



UL/CUL 技术 参数 (UL1059)				
UL/CUL Technical Data				
等 级	Use Group		B	C
额定电压	Rated Voltage	[V]	-	-
耐电压	Withstanding Voltage		2200V/1Min	
接线范围	Wire Range		24-10	
单/多芯线	Solid/Stranded	[AWG]		
IEC 技术参数 (IEC60947-7-2)				
IEC Technical Data				
过电压类别	Overvoltage Category		III	
污染等级	Contamination Class		3	
额定电压	Rated Voltage	[V]	-	
额定冲击电压			8	
Impulse withstand voltagea		[KV]		
导线截面积	Conductor cross section			
单芯	Solid	[mm ²]	0.2-6.0	
柔性导线	flexible	[mm ²]	0.2-4.0	
柔性导线带冷压头			0.2-4.0	
flexible with ferrule		[mm ²]		
材 料	Material			
绝缘材料	Insulation Material		PA66	
阻燃等级	Imflammability		UL94V-0	
导体材料	Contactora Material		铜合金 Copper alloy	
导体表面镀层	Contactive Coating		镀锡 Sn Plated	
一般参数 Other Data				
连接点数	connection points		4	
剥线长度	Stripping Length	[mm]	10-12	
导轨类型	Type of rail		DIN 35	
螺丝	Screw/扭矩 Torque(Max)	[N.m]	--	
工作温度	Operating temperatur	[°C]	-40-105	

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

黄绿色/green-yellow	GUV4-104-PE-00A
颜色/Colour	订货号 /Order No.

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本 / REV	V0
						名称 / TITLE	GUV4-104-PE-00A	



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD