




慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

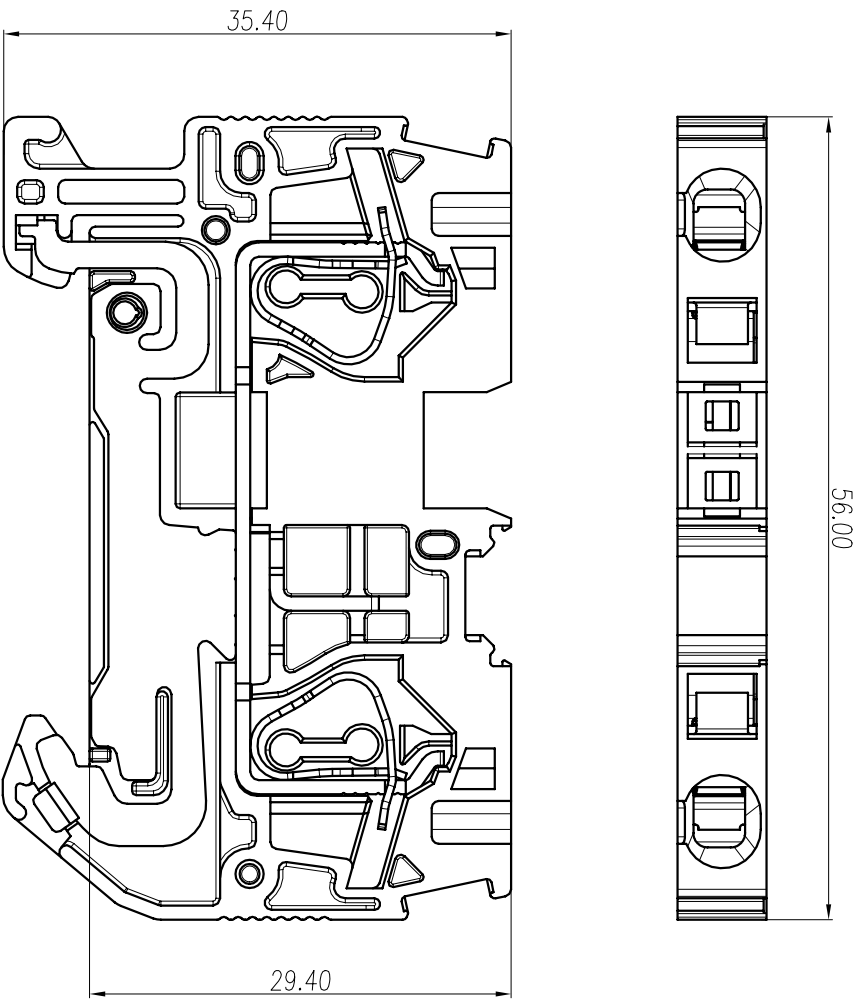

UL/CUL 技术参数 (UL1059)					cFV [®] _{us}
UL/CUL Technical Data					
等级	Use Group	B	C	D	
额定电压	Rated Voltage	V	-	-	
耐电压	Withstanding Voltage	2200V/1Min			
接线范围	Wire Range	24-10			
单/多芯线	Solid/Stranded	[AWG]			
IEC 技术参数 (IEC8947-2)					
IEC Technical Data					
过电压类别	Overvoltage Category	III			
污染等级	Contamination Class	3			
额定电压	Rated Voltage	V	-		
额定冲击电压	Rated impulse withstand voltage	[kV]	8		
导线横面积 Conductor cross section					
单芯	Solid	[mm ²]	0.25-0		
柔性导线	flexible	[mm ²]	0.2-0		
柔性导线带焊压头	flexible with ferrule	[mm ²]	0.2-0		
材料 Material					
绝缘材料	Insulation Material	PA66			
阻燃等级	Inflammability	UL94V-0			
导体材料	Conductor Material	铜合金 Copper alloy			
导体表面镀层	Conductive Coating	镀锡 Sn Plated			
一般参数 Other Data					
连接点数	connection points	2			
剥线长度	Stripping Length	[mm]	8-10		
导线类型	Type of rail	DIN 35			
螺丝	Screw Torque(Max)	[N.m]	-		
工作温度	Operating temperatur	[°C]	-40~105		

linear dimension(Tolerances Standard GB/T 14486-2008)											
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100		
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	

黄绿色 green-yellow	GUS4-102-PE-00A
颜色/Colour	订货号/Order No.

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
第三视角/THIRD ANGLE PROJECTION					
名称 / TITLE	GUS4-102-PE-00A				
版本 / REV	V0				



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD