
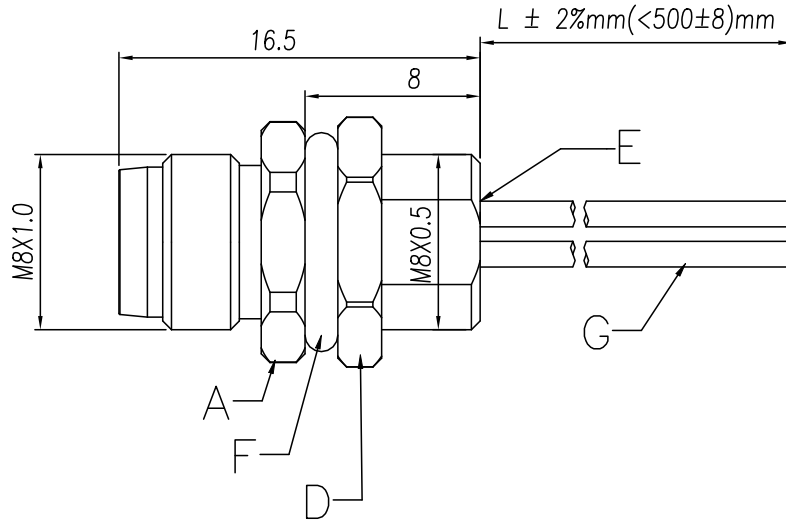
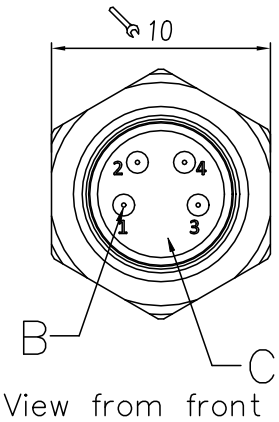


Contacts Pin 数	3Pin	4Pin	5Pin	6Pin	8Pin
Coding 编码	 A-Coding	 A-Coding	 B-Coding	 A-Coding	 A-Coding
Rated Current 额定电流	3A	3A	3A	1.5A	1.5A
Rated Voltage 额定电压	60V	60V	30V	30V	30V
Wire Range 线范围	24AWG	24AWG	24AWG	26AWG	26AWG
PART NO.品名 (0.5m)	M08-A03-ST0-M02-BH2-050	M08-A04-ST0-M02-BH2-050	M08-B05-ST0-M02-BH2-050	M08-A06-ST0-M02-BH2-050	M08-A08-ST0-M02-BH2-050
PART NO.品名 (1.0m)	M08-A03-ST0-M02-BH2-100	M08-A04-ST0-M02-BH2-100	M08-B05-ST0-M02-BH2-100	M08-A06-ST0-M02-BH2-100	M08-A08-ST0-M02-BH2-100
PART NO.品名 (3.0m)	M08-A03-ST0-M02-BH2-300	M08-A04-ST0-M02-BH2-300	M08-B05-ST0-M02-BH2-300	M08-A06-ST0-M02-BH2-300	M08-A08-ST0-M02-BH2-300
Customized. 定制化:					

L=500mm
L=1000mm
L=3000mm

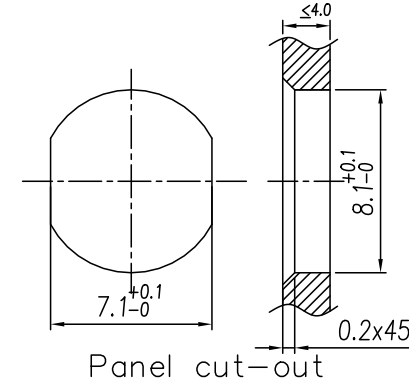

Panel cut-out

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	/		2021.08.18

IEC 技术参数		IEC61076-2-104
IEC Technical Data		
工作温度 Operating temperatur [°C]	-25~-+80	
防护等级 IP Class (IN Locked condition)	IP67	
额定电压 Rated Voltage [V]		
额定电流 Rated Current [A]		
导线截面积 Conductor cross section		
硬质/柔性导线 Solid/ flexible [mm²]		
接线范围 Wire Range		
单/多芯线 Solid/Stranded [AWG]		
材 料 Material		
绝缘材料 Insulation Material	PA 66	
阻燃等级 Imflammability	UL94V-0	
导体材料 Contactor Material	铜合金 Copper alloy	
导体镀层 Contactive Coating	镀金 Gold Plated	
螺母/螺丝 Connector Nut/Screw	Brass With Nickel Plated 铜镀镍	
符合RoHS环保要求		

G		WIRE	WIRE:UL1061 JACKET PVC	pcs	X
F		O—Ring	O—Ring FKM Black	pcs	1
E		Resin	Black epoxy resin for sealing	g	1
D		Nut	Nut:M8X0.5,Brass With Nickel Plated	pcs	1
C		Housing	M8 Male,Black PA66 UL94V—0	pcs	1
B		Terminal	Male Terminal ,Brass With Gold Plated	pcs	X
A		Screw	Screw M8X1.0,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials.No	品名 Name	材 料 规 格 Description	单位 Unit	用量 Qty

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD							PART NO.: M08-XXX-ST0-M02-BH2-XXX		
NO SPECIFIED TOLERANCE		Cus' P/N:	Order No :		---		Drawing No.:	SP-02-M000XX	
LINEAR	0.5~6	±0.1	DES.	Jun	DATE	UNITS	mm	THIRD ANGLE PROJECTION	PAGE
	6~30	±0.2							
		>30	±2%	CHK.	DATE	SIZE	A4		1 of 2
ANGLES	±1°		APP.		DATE	SCALE	X:X	文件等级：外部公开	

