



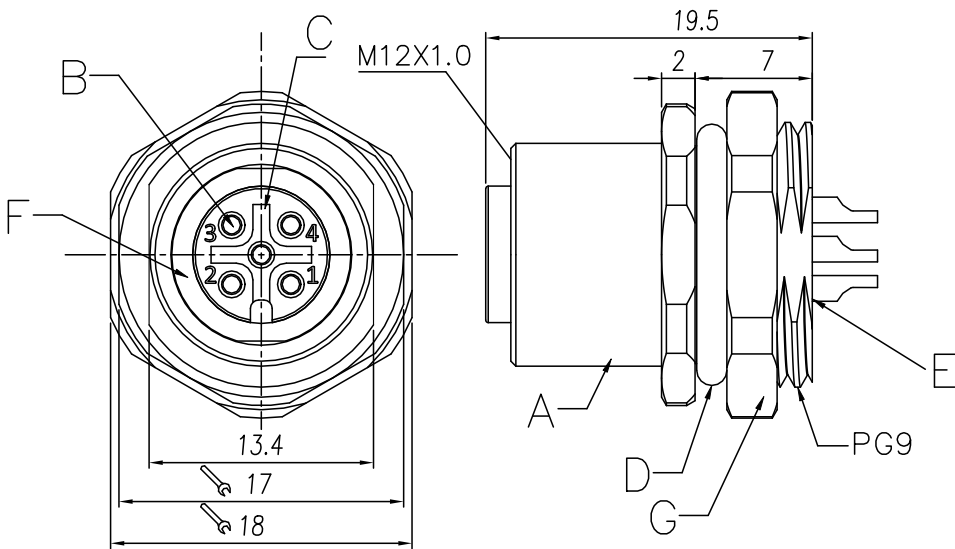

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

IEC 技术参数		IEC61076-2-101	
IEC Technical Data			
工作温度	Operating temperatur [°C]		-25~+80
防护等级	IP Class (IN Locked condition)		IP67
额定电压	Rated Voltage [V]		_____
额定电流	Rated Current [A]		_____
导线截面积	Conductor cross section		
硬质/柔性导线	Solid/ flexible [mm²]		
接线范围	Wire Range		
单/多芯线	Solid/Stranded [AWG]		
材料 Material			
绝缘材料	Insulation Material	PA 66	
阻燃等级	Imflammability	UL94V-0	
导体材料	Contactor Material	铜合金 Copper alloy	
导体镀层	Contactive Coating	镀金 Gold Plated	
螺母/螺丝	Connector Nut/Screw	Brass With Nickel Plated铜镀镍	
符合RoHS环保要求			

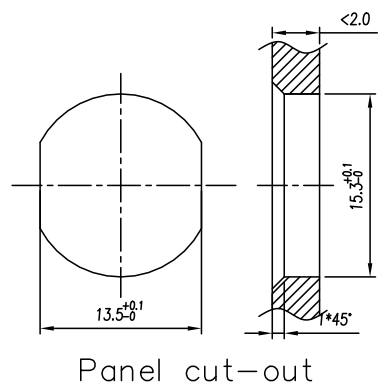

Contacts Pin 数	3Pin	4Pin	5Pin	8Pin	12Pin	17Pin
A—Coding						
Rated Current 额定电流	4A	4A	4A	2A	1.5A	1.5A
Rated Voltage 额定电压	250V	250V	60V	30V	30V	30V
Wire Range 线范围	22AWG	22AWG	22AWG	24AWG	26AWG	26AWG
PART NO.品名:	M12-A03-ST0-F02-BH2	M12-A04-ST0-F02-BH2	M12-A05-ST0-F02-BH2	M12-A08-ST0-F02-BH2	M12-A12-ST0-F02-BH2	M12-A17-ST0-F02-BH2

G		NUT	NUT PG9 ,Brass With Nickel Plated	pcs	1
F		O—Ring	O—Ring FKM Green	pcs	1
E		Resin	Black epoxy resin for sealing	g	2
D		O—Ring	O—Ring FKM Black	pcs	1
C		Housing	A—Coding Female,Black PA66	pcs	1
B		Terminal	Female Terminal ,Brass With Gold Plated	pcs	X
A		Screw	Screw M12 X1.0,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

				慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M12-AXX-ST0-F02-BH2	
NO SPECIFIED TOLERANCE		Cus' P/N:	Order No :		---		Drawing No.:		SP-02-M00XXX
LINEAR	0.5-6	±0.1	DES.	JUN	DATE	UNITS	mm	THIRD ANGLE PROJECTION	
	6-30	±0.2	CHK.		DATE	SIZE	A4		PAGE
	>30	±2%	APP.		DATE	SCALE	X:X		1 of 1
ANGLES	±1°				DATE	SCALE	X:X	文件等级:外部公开	