


Contacts Pin 数	4Pin
D—Coding	
Rated Current 额定电流	4A
Rated Voltage 额定电压	250V
Wire Range线范围	22AWG
PART NO.品名: (0. 20m)	M12-D04-ST0-F02-BQ1-020
PART NO.品名: (0. 50m)	M12-D04-ST0-F02-BQ1-050
Customized定制	

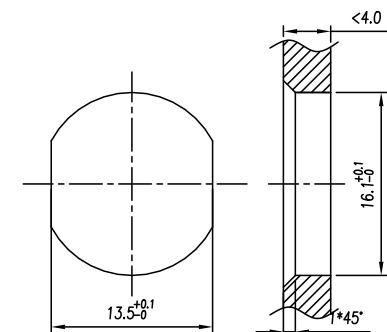

Wirelist

1 brown

2 white

3 blue

4 black

H		WIRE	WIRE:UL 1061 22AWG PVC	pcs	4
G		NUT	NUT M16 X1.5,Brass With Nickel Plated	pcs	1
F		O-Ring	O-Ring FKM Green	pcs	1
E		Resin	Black epoxy resin for sealing	g	2
D		O-Ring	O-Ring FKM Black	pcs	1
C		Housing	D-Coding Female 4PIN,Black PA66,UL94V-0	pcs	1
B		Terminal	Female Terminal ,Brass With Gold Plated	pcs	4
A		Screw	Screw M12 X1.0,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD										PART NO.: M12-D04-ST0-F02-BQ1-XXX		
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No :		---		Drawing No.:		SP-02-M000XX	
LINEAR	0.5~6	±0.1	DES.	JUN	DATE		UNITS	mm	THIRD ANGLE PROJECTION		PAGE	
	6~30	±0.2										
		>30	±2%	CHK.		DATE		SIZE	A4			1 of 1
ANGLES	±1°		APP.		DATE		SCALE	X:X	文件等级:外部公开			