


Contacts Pin 数	3Pin	4Pin	5Pin	6Pin	8Pin
Coding 编码	 A-Coding	 A-Coding	 B-Coding	 A-Coding	 A-Coding
Rated Current 额定电流	3A	3A	3A	1.5A	1.5A
Rated Voltage 额定电压	60V	60V	30V	30V	30V
Pin Size 导体直径	1.0mm	1.0mm	1.0mm	0.6mm	0.6mm
PART NO. 品名:	M08-A03-ST0-M01-BQ1	M08-A04-ST0-M01-BQ1	M08-B05-ST0-M01-BQ1	M08-A06-ST0-M01-BQ1	M08-A08-ST0-M01-BQ1
Customized. 定制化:					

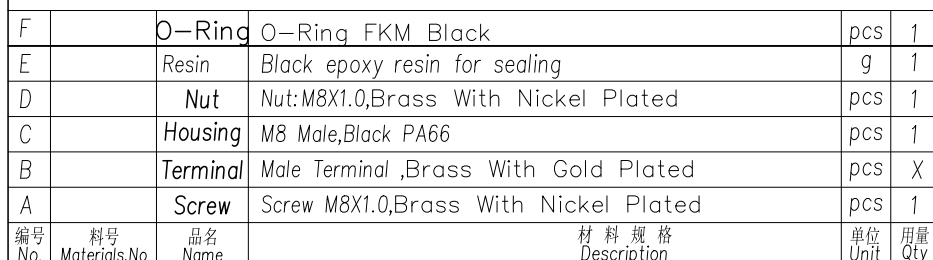

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD										PART NO.: M08-AXX-ST0-M01-BQ1			
NO SPECIFIED TOLERANCE			Cus' P/N:			Order No :		---		Drawing No.:		SP-02-M000XX	
LINEAR	0.5~6	±0.1	DES.	Jun	DATE		UNITS	mm	THIRD ANGLE PROJECTION		PAGE		
	6~30	±0.2											
		>30	±2%	CHK.		DATE		SIZE	A4			1 of 1	
ANGLES	±1°		APP.		DATE		SCALE	X:X	文件等级:外部公开				