


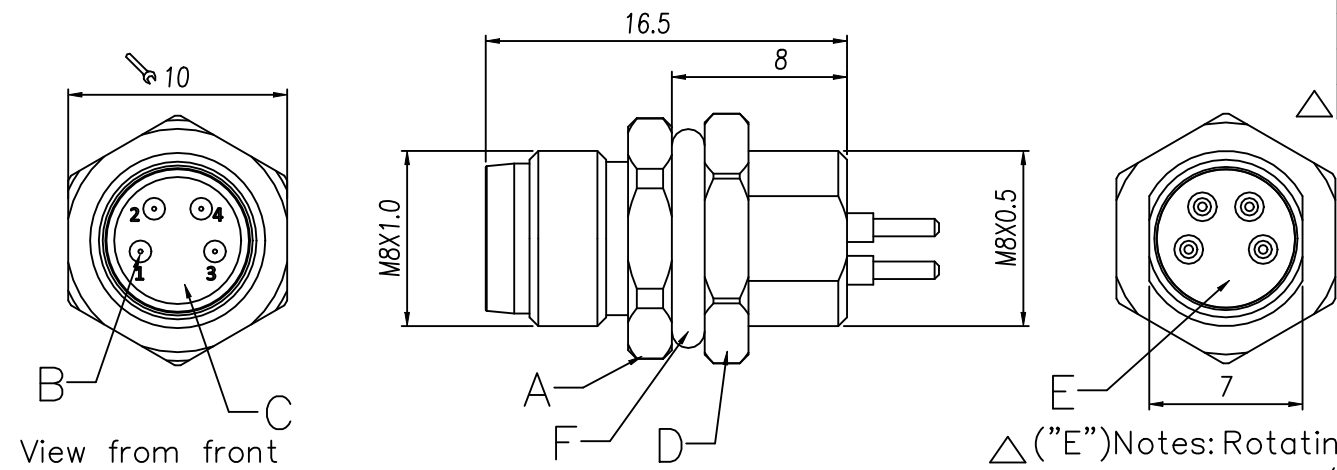



View from front

△("E")Notes:Rotating torque:
5.0 kgf/ cm(Max)

Contacts Pin 数	3Pin	4Pin	5Pin	6Pin	8Pin
Coding 编码	 A-Coding	 A-Coding	 B-Coding	 A-Coding	 A-Coding
Rated Current 额定电流	3A	3A	3A	1.5A	1.5A
Rated Voltage 额定电压	60V	60V	30V	30V	30V
Pin Size 导体直径	1.0mm	1.0mm	1.0mm	0.6mm	0.6mm
PART NO. 品名:	M08-A03-ST0-M01-BH2	M08-A04-ST0-M01-BH2	M08-B05-ST0-M01-BH2	M08-A06-ST0-M01-BH2	M08-A08-ST0-M01-BH2
Customized. 定制化:					

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	_____		2021.08.18
V1	Add Notes	_____		2024.11.25
ng torque: / cm(Max)		IEC 技术参数 IEC61076-2-104		
		IEC Technical Data		
		工作温度 Operating temperatur [°C]		-25~+80
		防护等级 IP Class (IN Locked condition)		IP67
		额定电压 Rated Voltage [V]		
		额定电流 Rated Current [A]		
		导线截面积Conductor cross section		
		硬质/柔性导线 Solid/ flexible [mm²]		
		接线范围 Wire Range		
		单/多芯线 Solid/Stranded [AWG]		
		材料 Material		
		绝缘材料 Insulation Material		PA 66
		阻燃等级 Imflammability		UL94V-0
		导体材料 Contactor Material		铜合金 Copper alloy
导体镀层 Contactive Coating		镀金 Gold Plated		
螺母/螺丝 Connector Nut/Screw		Brass With Nickel Plated铜镀镍		
符合RoHS环保要求				

PCB Layout:

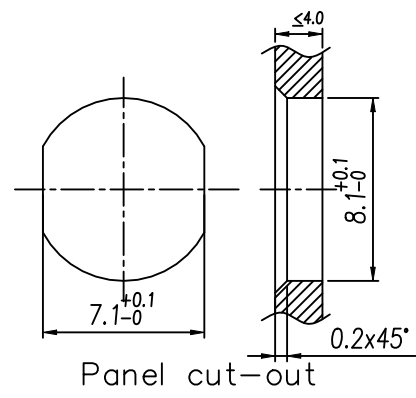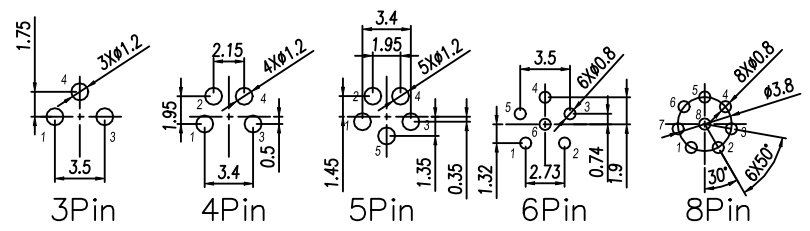

F	O-Ring	O-Ring FKM Black	pcs	1
E	Resin	Black epoxy resin for sealing	g	1
D	Nut	Nut:M8X0.5,Brass With Nickel Plated	pcs	1
C	Housing	M8 Male,Black PA66	pcs	1
B	Terminal	Male Terminal ,Brass With Gold Plated	pcs	X
A	Screw	Screw M8X1.0,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit 用量 Qty

						慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.:(See Table) M08-XXX-ST0-M01-BH2		
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No.:		---		Drawing No.:		SP-02-M000XX	
LINEAR	0.5-6	±0.1	DES.	Jun	DATE		UNITS	mm	THIRD ANGLE PROJECTION		PAGE 1 of 1	
	6-30	±0.2										
	>30	±2%										
ANGLES		±1°	APP.		DATE		SCALE	X:X	文件等级: 外部公开			