


Contacts Pin 数	3Pin	4Pin	5Pin	8Pin	12Pin	17Pin
A—Coding						
Rated Current 额定电流	4A	4A	4A	2A	1.5A	1.5A
Rated Voltage 额定电压	250V	250V	60V	30V	30V	30V
Wire Range线范围	22AWG	22AWG	22AWG	24AWG	26AWG	26AWG
PART NO. 品名: (0. 15m)	M12-A03-ST0-M02-BQ3-015	M12-A04-ST0-M02-BQ3-015	M12-A05-ST0-M02-BQ3-015	M12-A08-ST0-M02-BQ3-015	M12-A12-ST0-M02-BQ3-015	M12-A17-ST0-M02-BQ3-015
PART NO. 品名: (0. 5m)	M12-A03-ST0-M02-BQ3-050	M12-A04-ST0-M02-BQ3-050	M12-A05-ST0-M02-BQ3-050	M12-A08-ST0-M02-BQ3-050	M12-A12-ST0-M02-BQ3-050	M12-A17-ST0-M02-BQ3-050
PART NO. 品名: (0. 6m)	M12-A03-ST0-M02-BQ3-060	M12-A04-ST0-M02-BQ3-060	M12-A05-ST0-M02-BQ3-060	M12-A08-ST0-M02-BQ3-060	M12-A12-ST0-M02-BQ3-060	M12-A17-ST0-M02-BQ3-060
Customized定制化:						



G		WIRE	WIRE:UL 1061	pcs	X
F		O-Ring	O-Ring FKM Black	pcs	1
E		Resin	Black epoxy resin for sealing	g	2
D		Nut	Nut: M12 X1.0,Brass With Nickel Plated	pcs	1
C		Housing	A-Coding Male,Black PA66	pcs	1
B		Terminal	Male Terminal ,Brass With Gold Plated	pcs	X
A		Screw	Screw M12 X1.0,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD								PART NO.: M12- <u>AXX</u> -ST0-M02-BQ3- <u>XXX</u>				
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No :		---		Drawing No.:		SP-02-M000XX	
LINEAR	0.5~6	±0.1	DES.	Jun	DATE			UNITS	mm	THIRD ANGLE PROJECTION		PAGE 1 of 2
	6~30	±0.2										
	>30	±2%	CHK.		DATE			SIZE	A4			
ANGLES	±1°		APP.		DATE			SCALE	X:X	文件等级：外部公开		

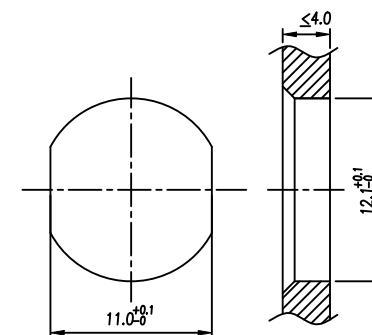