



Contacts Pin 数	4Pin
D—Coding	 Male Female
Rated Current 额定电流	4A
Rated Voltage 额定电压	250V
PART NO.品名:	M12-D04-ST2-M02-BF2
Customized定制化:	

Diagram illustrating a 4x2 grid of cells. The top two rows are labeled *P1* and *P2*. The bottom two rows are labeled *Shield*. The cells are numbered 1 through 4 in each row.

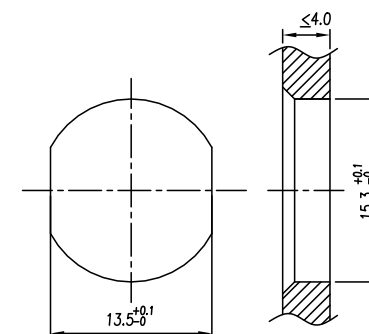

H	Resin	Black epoxy resin for sealing	g	2	
G	O-ring	O-ring,FKM Green	pcs	1	
F	NUT	NUT PG9, Brass With Nickel Plated	pcs	1	
E	O-ring	O-ring,FKM Black	pcs	1	
D	Housing	D-Coding Female,Black PA66	pcs	1	
C	Housing	D-Coding Male,Black PA66	pcs	1	
B	Terminal	Terminal ,Brass With Gold Plated	pcs	X	
A	Screw	Screw M12 X1.0,Brass With Nickel Plated	pcs	1	
编号 No.	料号 Materials No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: M12-D04-ST2-M02-BF2				
NO SPECIFIED TOLERANCE			Cus' P/N:	Order No :	---		Drawing No.:	SP-02-M0XXXX		
LINEAR	0.5~6	±0.1	DES.	JUN	DATE		UNITS	mm	THIRD ANGLE PROJECTION 	PAGE 1 of 1
	6~30	±0.2	CHK.		DATE		SIZE	A4		
	>30	±2%								
ANGLES	±1°		APP.		DATE		SCALE	X:X	文件等级:外部公开	