


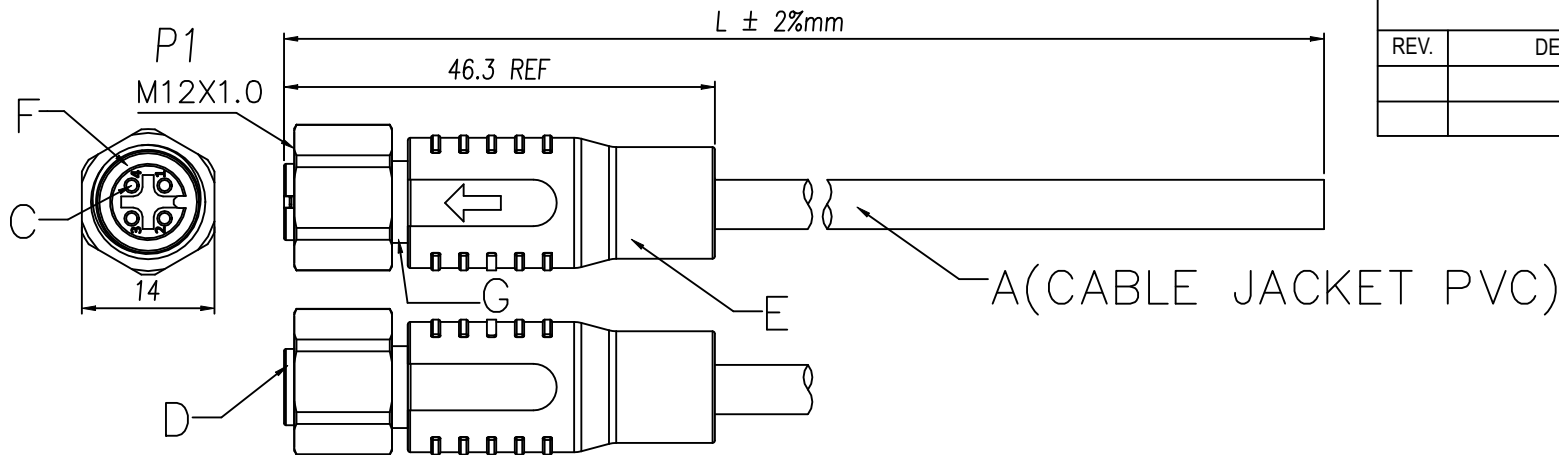

Contacts Pin 数	4Pin
A-Coding	
Rated Current 额定电流	4A
Rated Voltage 额定电压	250V
Wire Range线范围	22AWG
PART NO. 品名: (1M)	M12-A04-ST2-F02-SCC-100N
PART NO. 品名: (2M)	M12-A04-ST2-F02-SCC-200N
PART NO. 品名: (3M)	M12-A04-ST2-F02-SCC-300N
PART NO. 品名: (5M)	M12-A04-ST2-F02-SCC-500N
Customized.定制化	

P1	Wirelist
1	brown
2	white
3	blue
4	black
Shield	Braid

REVISION RECORD				
REV.	DESCPTION	ECN No.	APPROVED	DATE

IEC 技术参数		IEC61076-2-101
IEC Technical Data		
工作温度	Operating temperatur [°C]	-25~+80
防护等级	IP Class (IN Locked condition)	IP67
额定电压	Rated Voltage [V]	250
额定电流	Rated Current [A]	4
导线截面积	Conductor cross section	0.34
硬质/柔性导线	Solid/ flexible [mm²]	
接线范围	Wire Range	22
单/多芯线	Solid/Stranded [AWG]	
材 料 Material		
绝缘材料	Insulation Material	PA 66
阻燃等级	Imflammability	UL94V-0
导体材料	Contactur Material	铜合金 Copper alloy
导体镀层	Contactive Coating	镀金 Gold Plated
螺母/螺丝	Connector Nut/SCCew	不锈钢
		Stainless steel
符合RoHS环保要求		

G	Pipe	Shield Pipe,Brass With Nickel Plated	pcs	1	
F	O-ring	O-ring,FKM Green	pcs	1	
E	TPU	Molded With Black TPU	G	8	
D	Housing	A-Coding Female 4PIN,Black PA66	pcs	1	
C	Terminal	Female Terminal ,Brass With Gold Plated	pcs	4	
B	SCCew	SCCew M12 X1.0,Stainless steel	pcs	1	
A	Cable	UL TYPE 22AWG X4C+AL+Braid Black PVC Jacket	mm	L	
编号 No.	料号 Materials.No	品名 Name	材料规格 DeSCCRIPTION	单位 Unit	用量 Qty

		慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M12-A04-ST2-F02-SCC-XXXX	
NO SPECIFIED TOLERANCE			Cus' P/N:	Order No.:	---	Drawing No.:	SP-02-M0XXXX
LINEAR	0.5-6	±0.1	DES.	JUN	DATE	UNITS	mm
	6-30	±0.2	CHK.	DATE	SIZE	A4	THIRD ANGLE PROJECTION
	>30	±2%	APP.	DATE	SCALE	X:X	PAGE 1 of 1
ANGLES	±1°		文件等级: 外部公开				