


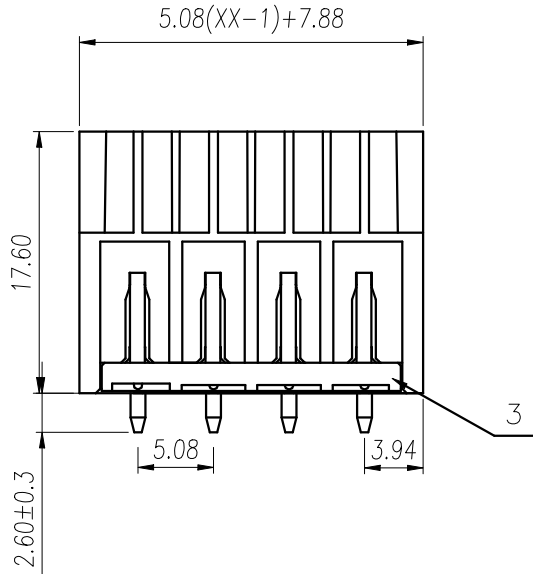


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除经给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者须承担赔偿责任。 本公司保留对涉及发明、实用新型和外观设计的所有权利。

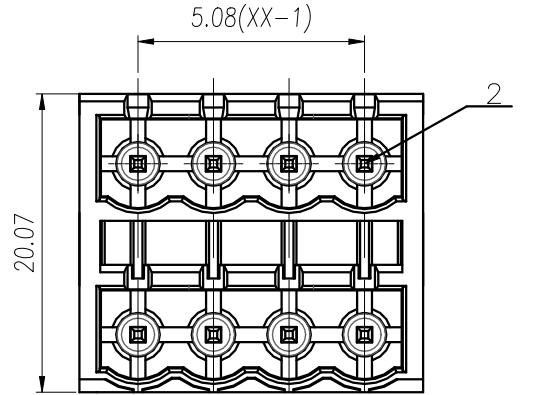

P.C.B. LAYOUT

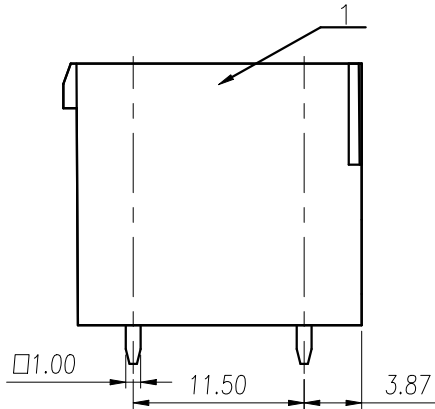

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		WangP	25.02.10

UL/CUL 技术参数		UL/CUL Technical Data			
等级	Use Group	B	C	D	
额定电压	Rated Voltage [V]	300	-	300	
额定电流	Rated Current [A]	15	-	10	
接线范围	Wire Range	-			
单/多芯线	Solid/Stranded [AWG]				
耐压	Withstanding Voltage	1600V/1Min			
IEC 技术参数		IEC61984			
IEC Technical Data					
过电压类别	Overvoltage Category	III	III	II	
污染等级	Contamination Class	3	2	2	
额定电压	Rated Voltage [V]	250	320	400	
额定电流	Rated Current [A]	12	12	12	
额定冲击电压	Impulse withstand voltage [KV]	4.0	4.0	4.0	
导线截面积	Conductor cross section	-			
硬质/柔性导线	Solid/ flexible [mm²]				
一般参数 Other Data					
间距 Pitch / 极数 Poles	[mm] / [P]	5.08 / 2*02~2*12			
工作温度	Operating temperature [°C]	-40~130			
焊接方法	Soldering method	Reflow Soldering			
符合RoHS环保要求					

3	Cover	LCP	UL94V-0
2	Pin 1	Copper Alloy	Sn Plated
1	Housing	LCP	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	WangP	DATE	25.02.10	UNITS	mm	THIRD ANGLE PROJECTION	⑩
CHK.	YangHJ	DATE	25.02.10	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	DATE	25.02.10	SCALE		DRAWING TYPE: SP-03	REV V0

慈溪市万捷电子有限公司		PART NO.:	
CIXI WANJIE ELECTRONIC CO., LTD		WJ2EDGVHB-THR-5.08-2*XXP-1Y-00A	